# AIRLOCKER (ARB)

## AIR OPERATED LOCKING DIFFERENTIAL

**RD140** 

FORD 'Sterling', 101/4" & 101/2", 35 SPLINE

<b>PARTS L</b>	IST			
ITEM #	QTY	DESCRIPTION	PART#	NOTES
01	1	SEAL HOUSING KIT	082105SP	
02	-	TAPERED ROLLER BEARING	NOT SUPPLIED	3
03	1	FLANGE CAP KIT	028611SP	
04	1	BONDED SEAL	160703SP	
05	1	CLUTCH GEAR & WAVESPRING KIT	050907SP	6
*	1	<b>CLUTCH GEAR &amp; RETURN SPRINGS KIT</b>	050807SP	6
06	1	LONG CROSS SHAFT	061501SP	
07	2	SHORT CROSS SHAFT	061601SP	
08	2	SIDE GEAR THRUST WASHER	SEE NOTE	4
09	1	DIFFERENTIAL CASE (SUITS WAVESPRING ONLY)	013231SP	5
*	1	DIFFERENTIAL CASE (SUITS RETURN SPRINGS ONLY)	013211SP	5
10	1	COUNTERSUNK SCREW (PK OF 2)	200214SP	
11	1	RETAINING PIN SET (PK OF 4)	120601SP	
12	1	SEAL HOUSING O-RINGS (PK OF 2)	160248SP	1
13	1	SHIM KIT	SHK006	
14	1	WAVESPRING	150707SP	6
*	1	RETURN SPRINGS KIT	150107SP	6
15	1	SPLINED SIDE GEAR	SEE NOTE	2
16	4	PINION THRUST WASHER	SEE NOTE	4
17	4	PINION GEAR	SEE NOTE	2
18	1	SPIDER BLOCK	070402SP	
19	1	SIDE GEAR	SEE NOTE	2
*	1	BULKHEAD FITTING KIT (BANJO TYPE)	170114	7
*	1	AIR LINE (6mm DIA X 6m LONG)	170314	7
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209SP	
*	1	SWITCH COVER (REAR)	180211SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	2102140	

#### **NOTES**

- 1 For replacement O-rings use only BS140 Viton 75.
- 2 Available only as complete 6 gear set # 728K121.
- 3 For replacement bearing use Timken part # 469 / 453X.
- 4 Available only as complete thrust washer kit #730K01.
- 5 Identify the spring type in your diff and order the correct diff case to replace.
- Replace the spring and/or the corresponding clutch gear with the same type.

  (If spring type is changed, a matching diff case must also be used. See item 09.)
- 7 All diffs produced before serial #17070001 came with 5mm air connection system. For information contact ARB.
- Suitable for use with ABS tone ring.
- Ford 10.25" & 10.5" corporate Sterling model can be visually distinguished from a Dana Spicer model by the absence of a filler hole in the OE inspection cover.




<sup>\*</sup> Not illustrated in exploded view



## AIR OPERATED LOCKING DIFFERENTIAL

**RD140** 

FORD 'Sterling', 101/4" & 101/2", 35 SPLINE

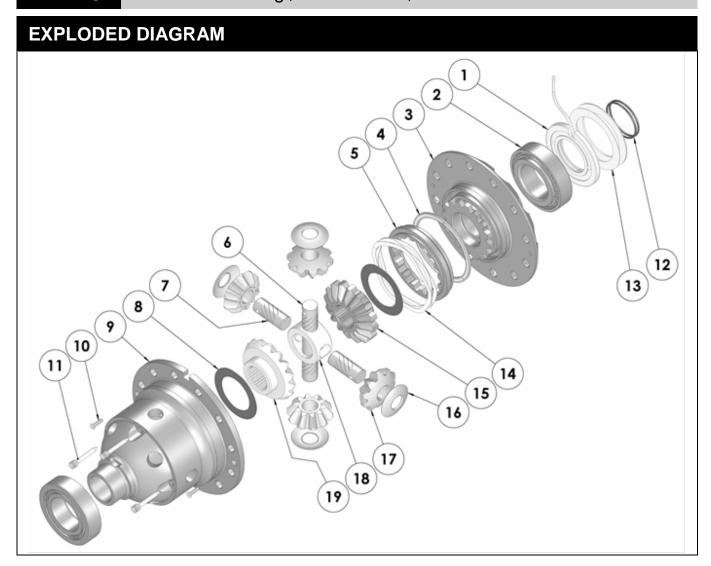

### **SPECIFICATIONS**

Axle Spline 35 tooth, Ø38.1mm [1.50"]

Ratio Supported A

Ring Gear ID 165.1mm [6.50"]

Ring Gear OD 260/268mm [10.25/10.50"]

Ring Gear Bolts 12 bolts on Ø192mm [7.56"]

Ring Gear Torque 129Nm [95 ft-lb]

Backlash 0.28-0.41mm [0.011-0.016"]

AIRLOCKER ARB