

# AIR OPERATED LOCKING DIFFERENTIAL

**RD53** 

Dana 70HD,35 SPL,4.56 & UP

#### \*\*THIS MODEL WAS SUPERSEDED BY RD172, CROSSED OUT PARTS NOT AVAILABLE

PARTS L	IST			
ITEM#	QTY	DESCRIPTION	PART#	NOTES
01	1	FLANGE CAP	<del>022501</del>	
02	1	CLUTCH GEAR	<del>050401</del>	
03	1	DIFFERENTIAL CASE	<del>012401</del>	
04	1	RETURN SPRING (PK OF 4)	150101SP	
05	1	RETAINING PIN SET (PK OF 4)	120301SP	
06	1	LONG CROSS SHAFT	<del>060703</del>	
07	2	SHORT CROSS SHAFT	<del>060802</del>	
08	1	PISTON	040501SP	
09	1	BONDED SEAL	160703SP	
10	1	CYLINDER CAP	<del>031203</del>	
11	1	SEAL HOUSING O-RINGS (PK OF 2)	160220SP	1
12	1	CYL CAP RETAINING BOLT (PK OF 8)	200205SP	
13	1	LOCKING TAB (8mm) (PK OF 8)	150401SP	
14	1	TAPERED ROLLER BEARING	160113	2
15	1	SEAL HOUSING KIT	080703SP	
16	1	SHIM KIT	SHK006	
*	1	MASTER SHIM	150336	
17	1	SPLINED SIDE GEAR	SEE NOTE	3
18	1	PINION THRUST WASHER (PK OF 4)	151104SP	
19	4	PINION GEAR	SEE NOTE	3
20	1	SPIDER BLOCK	<del>070401</del>	
21	1	SIDE GEAR	SEE NOTE	3
22	1	S GEAR THRUST WASHER (PK OF 2)	151004SP	
*	1	BULKHEAD FITTING KIT (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8"BSPP)	170201SP	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301SP	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209SP	
*	1	SWITCH COVER (REAR)	180211SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	210253	

<sup>\*</sup> Not illustrated in exploded view

## **NOTES**

- 1 For replacement O-rings use only BS141 Viton 75.
- 2 For replacement bearing use Timken part # 39250 / 39412.
- 3 Available only as complete 6 gear set # 728E011
- For the 35 spline Dana 70U with a carrier bearing OD of 96.84mm [3.813"] refer to RD65 (Section 2.65).
- For ratios of 4.10:1 and down refer to RD54 (Section 2.54).






## AIR OPERATED LOCKING DIFFERENTIAL

**RD53** 

Dana 70HD,35 SPL,4.56 & UP

\*\*THIS MODEL WAS SUPERSEDED BY RD172, CROSSED OUT PARTS NOT AVAILABLE

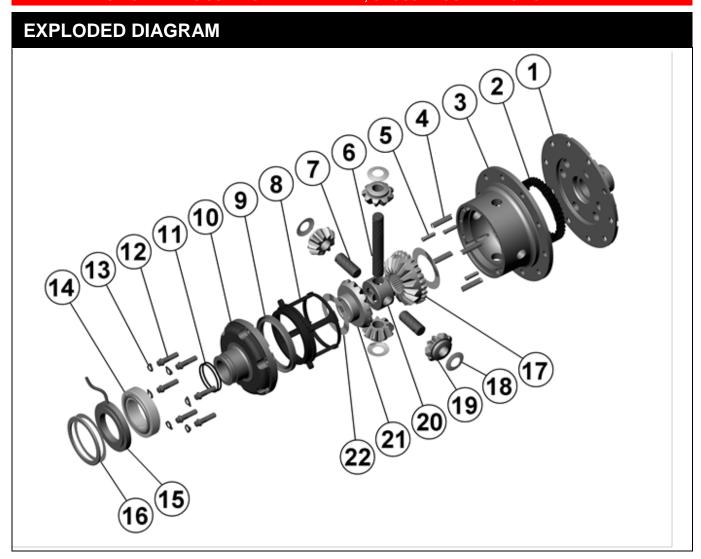

#### **SPECIFICATIONS**

Axle Spline 35 tooth, Ø38.1mm [1.50"]

Ratio Supported 4.56:1 & up Ring Gear ID 174.9mm [6.89"] Ring Gear OD 267mm [10.5"]

Ring Gear Bolts 12 bolts on Ø203mm [8.00"]

Ring Gear Torque 149Nm [110 ft-lb]

Backlash 0.15-0.25mm [0.006-0.010"]

Bearing Cap Torque 108Nm [80 ft-lb] Carrier Bearing OD 104.78mm [4.125"]

ARB Corporation Ltd • 42-44 Garden St Kilsyth VIC 3137 Australia
ARB 4X4 Accessories USA • 720 SW 34<sup>th</sup> St Renton WA 98057 USA
Australia & International Customer Service • +61 3 9761 6622
North America Customer Service • Toll Free 866 293 9078
www.arb.com.au (AUS & Int) www.arbusa.com (N. America)