AIRLOCKER **ARB**

AIR OPERATED LOCKING DIFFERENTIAL

RD132

Toyota 8",50mm BRNG

PARTS LIST				
ITEM#	OTY	DESCRIPTION	PART #	NOTES
01	1	FLANGE CAP KIT	027309SP	NOTES
02	1	BONDED SEAL	160702SP	
03	1	CLUTCH GEAR & WAVESPRING KIT	050906SP	
04	2	SHORT CROSS SHAFT	060403SP	
05	1	LONG CROSS SHAFT	060204SP	
06	1	SIDE GEAR	SEE NOTE	3
07	2	SIDE GEAR SIDE GEAR THRUST WASHER	SEE NOTE	4
08	1	COUNTERSUNK SCREW (PK OF 2)	200213SP	-
09	1	RETAINING PIN SET (PK OF 4)	120601SP	
10		TAPERED ROLLER BEARING	NOT SUPPLIED	2
11	1	SEAL HOUSING RETAINING CLIP	150601SP	
12	1	SEAL HOUSING KETAINING CLIP SEAL HOUSING KIT	081901SP	
13	1	SEAL HOUSING O-RINGS (PK OF 2)	160207-2	1
14	1	ADJUSTER NUT	100207-2 100101SP	•
14		WAVESPRING	1001015P 150706SP	
16	1		SEE NOTE	3
	1	SPLINED SIDE GEAR		3
17	4	PINION GEAR	SEE NOTE	3 4
18	4	PINION THRUST WASHER	SEE NOTE	4
19	1	SPIDER BLOCK	070201SP	
20	1	DIFFERENTIAL CASE	013009SP	
*	1	ADJUSTER NUT	100103SP	_
*	1	BULKHEAD FITTING KIT (BANJO TYPE)	170114	5
*	1	AIR LINE (6mm DIA X 6m LONG)	170314	5
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH FR OR RR LOCKER	180225SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	2102132	

* Not illustrated in exploded view

NOTES

- 1 For replacement O-rings use only BS136 Viton 75.
- For 80mm Bearing OD use Timken Bearing #32010X (ARB# 160116).
 For 83mm Bearing OD use Koyo or SKF bearing TR100802-2 (ARB# 160118).
- 3 Available only as complete 6 gear set # 728H111
- 4 Available only as complete thrust washer kit #730H01
- 5 All diffs produced before serial #17070001 came with 5mm air connection system. For information contact ARB.
- For 8" Toyota IFS refer to RD111 (Section 2.111)
 RD121 (Section 2.121) & RD131 (Section 2.131)
- For 8" Toyota shim pre-loaded rear refer to RD133 (Section 2.133).
- Refer to seal housing set-up tech note (Sec. 5.2).
- Refer to pinion modification tech note (Sec. 5.6).








RD132

Toyota 8",50mm BRNG

EXPLODED DIAGRAM

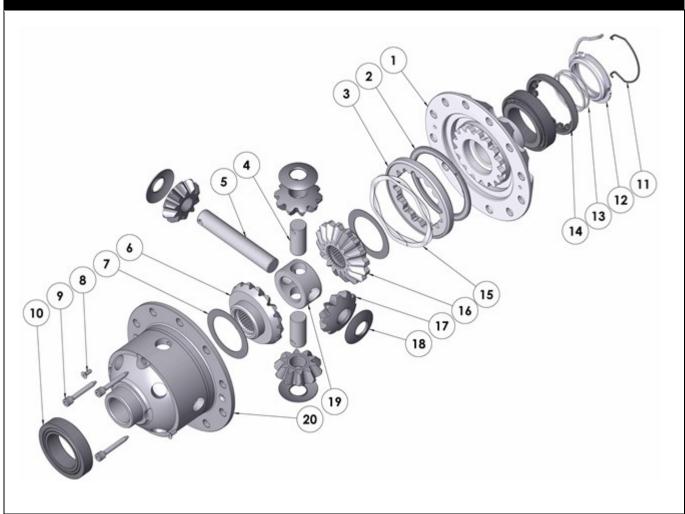

SPECIFICATIONS

Axle Spline 30 tooth, Ø33mm [1.31"]

Ratio Supported A

Ring Gear ID 126.0mm [4.96"] Ring Gear OD 200mm [8"]

Ring Gear Bolts 10 bolts on Ø160mm [6.30"]

Ring Gear Torque 95Nm [70 ft-lb]

Backlash 0.15-0.25mm [0.006-0.010"]

Bearing Cap Torque 95Nm [70 ft-lb]